

Het is nu mogelijk om een intercom oproep direct op een Windows PC te beantwoorden. Dit zijn de vereisten:



U heeft een **pc**, **luidsprekers** en een **microfoon** of een **headset** en **microfoon** en een **videocompatibele** intercom nodig.

STAP 1: Log in met uw account op Intratone.info.

STAP 2: Met de I-knop kunt u de software "My intercom" downloaden.


STAP 3: Geef het e-mailadres van de bewoner door (nodig voor het abonnement).

The record	
Name	
Username	
Primary phone	
Secondary phone	
Video call	☐ This box is automatically managed with the tenant's "My intercom" application
Video call - secondary phone	☐ Hit P to simulate a pause during the call
Email address	Necessary for video call on a Windows PC
Speed dial no.	
Display type	Name, Username, Speed dial no.
Display	Normal
Time range	-Choose a time range-

Save


STAP 4: Voer hetzelfde e-mailadres in als in STAP 2.

STAP 5: Voer het telefoonnummer van de bewoner in.

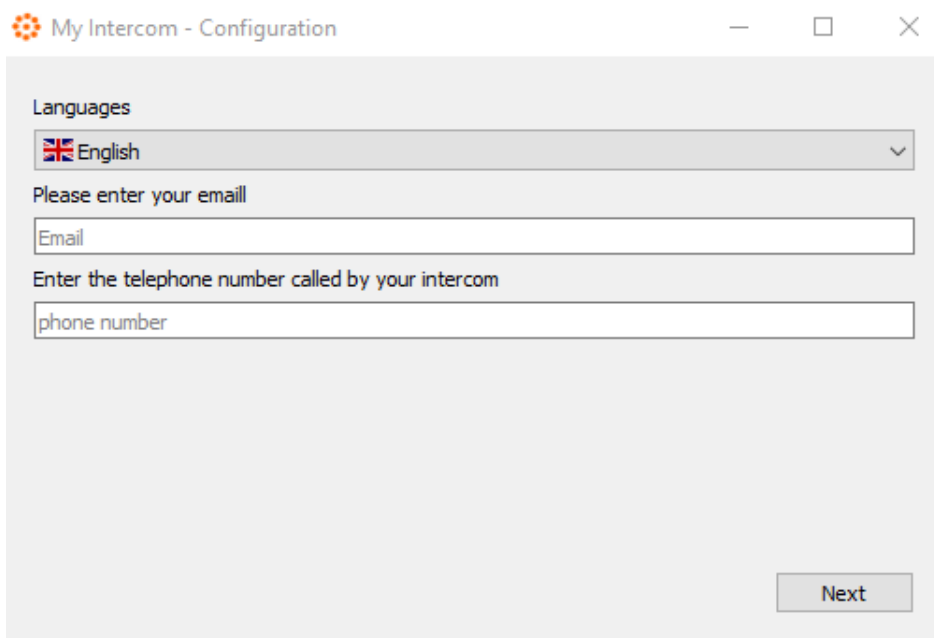

The screenshot shows the 'My Intercom - Configuration' window. It has a title bar with a gear icon and standard window controls. The main content area includes a 'Languages' section with a dropdown menu set to 'English'. Below this, there are two input fields: 'Please enter your email' and 'Enter the telephone number called by your intercom'. A 'Next' button is located at the bottom right. Two orange circles with the numbers '4' and '5' are overlaid on the right side of the window, pointing to the email and phone number fields respectively.

STAP 6: Voer de code in die u in uw mailbox hebt ontvangen.

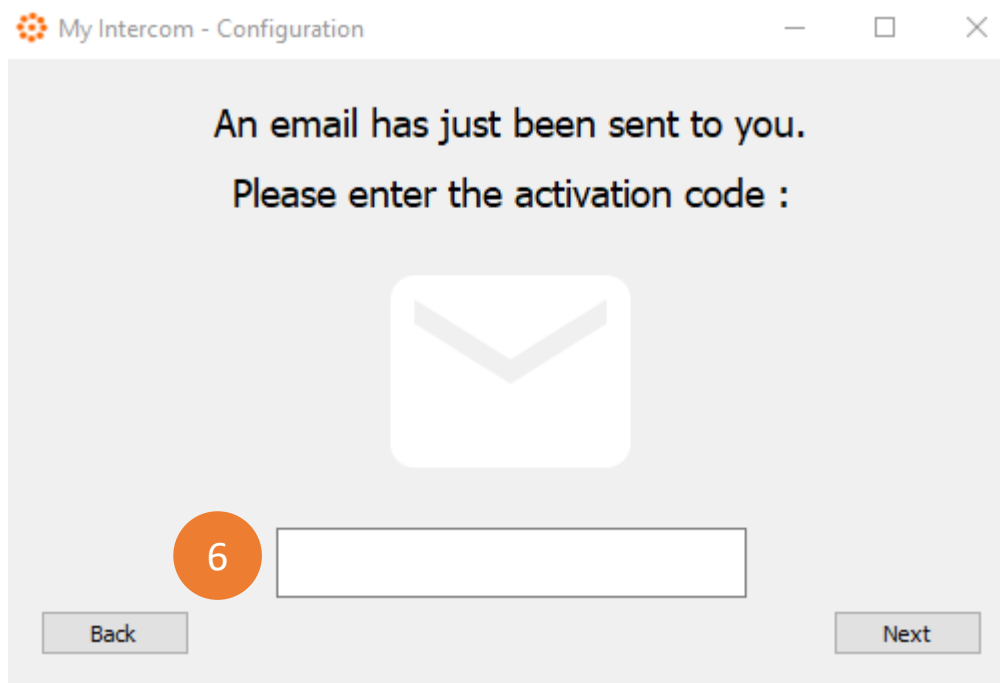

The screenshot shows the 'My Intercom - Configuration' window at a different stage. It displays the message 'An email has just been sent to you. Please enter the activation code :'. Below the text is a large envelope icon. At the bottom, there is a single input field for the activation code. Two orange circles with the numbers '6' and '5' are overlaid on the left and right sides of the window, pointing to the activation code field and the phone number field from the previous step respectively. 'Back' and 'Next' buttons are visible at the bottom.